Sealing for Appliance Inlets

6100 with sealing to appliance

Description
Protects from ingressing fluids and dust into the appliance

References
Weblinks
pdf, html, General Product Information, Approvals, RoHS, CHINA-RoHS, Mating Connectors, e-Store, SCHURTER-Stock-Check, Distributor-Stock-Check, Accessories

Dimensions
1) Mounted from front side

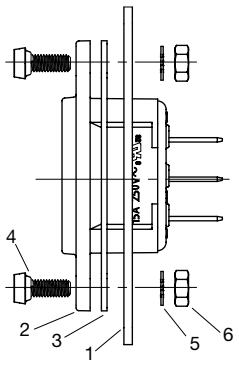

Panel thickness max. 3 mm
Tightening torque max 0.1 Nm
1 Chassis
2 Appliance inlet
3 Flat gasket (included in 0098.0103)
4 Srew with sealing (included in 0098.0103)
5 Lock washer (not part of kit)
6 Nut 0.8d (not part of kit)

1) Mounted from rear side

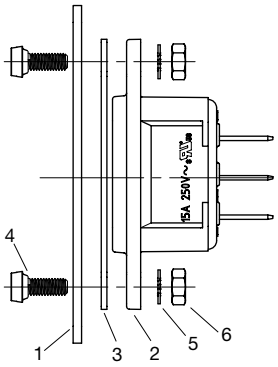

Panel thickness max. 3 mm
Tightening torque max 0.1 Nm

Variants

Suitable for	Degree of Protection	Mounting side	Mounting instruction	Mounting option	Order Number
http://www.schurter.ch/pdf/english/typ_.pdf, http://www.schurter.ch/pdf/english/typ_.pdf, http://www.schurter.ch/pdf/english/typ_.pdf, http://www.schurter.ch/pdf/english/typ_.pdf, http://www.schurter.ch/pdf/english/typ_.pdf, http://www.schurter.ch/pdf/english/typ_.pdf, http://www.schurter.ch/pdf/english/typ_.pdf, http://www.schurter.ch/pdf/english/typ_.pdf, http://www.schurter.ch/pdf/english/typ_.pdf, http://www.schurter.ch/pdf/english/typ_.pdf	IP 54	Front-/Rear-Side	1)	Screws included	0098.0103

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments.